


### About Cashly Training Kit

The IP Video Intercom Kit combines the JSL-05W indoor monitor, JSL-I11 video door phone, and the CASHLY mobile app—designed for villas and single-family residences. It enables crystal-clear video communication and remote door unlocking directly from the monitor or smartphone app. With multiple access methods, dual-band Wi-Fi (2.4G/5G), and an easy plug-and-play setup, installation is both quick and hassle-free.



### Main Features

- Plug-and-play, quickly deployment.
- Flexible door access methods.
- Monitor door phone camera footage on both mobile and indoor station.
- Remote door opening anytime, anywhere.
- Support one-touch calling.
- CCTV integration

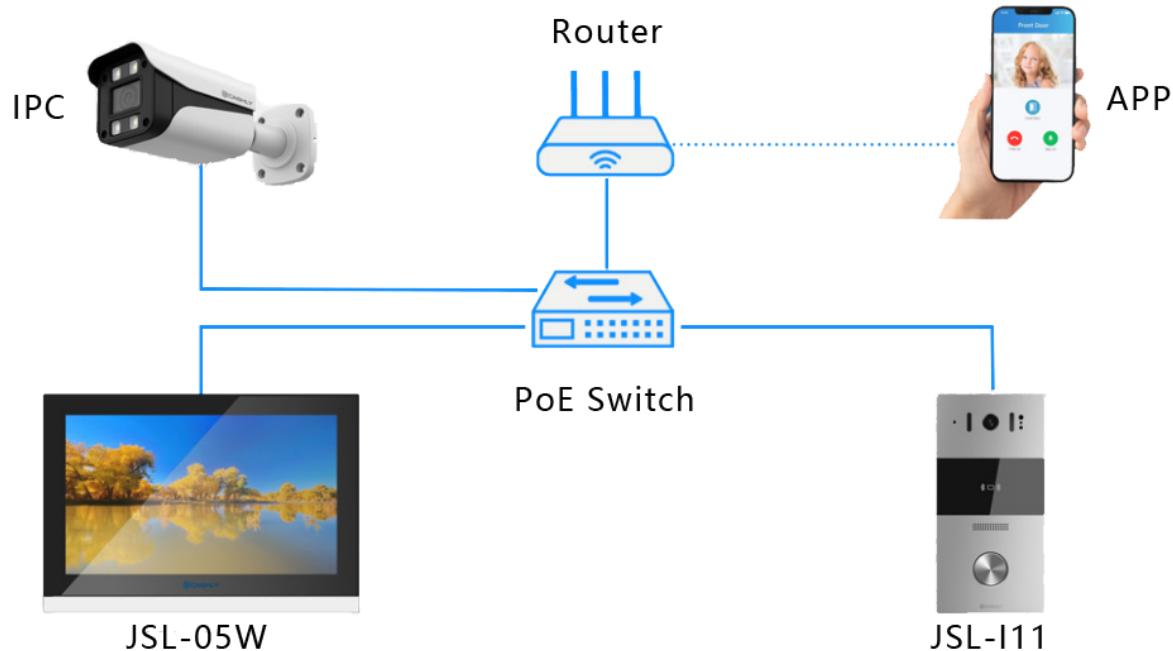

## JSL-I11 Specifications

Panel type	Tempered Glass
System	Linux
Body	Aluminum
Camera	High-definition 2-megapixel
Connection Method	LAN (Optional Wi-Fi)
Video Coding	H.264 / H.265
Network	DHCP
Power Supply	DC12V / 1A or POE power supply
Working Current	400mA
Working Temperature	-30°C~70°C
IP Level:	IP65
Storage Temperature	-40°C~70°C
Working Humidity	10%~90%
Size (LWH)	177.29x88x28.56mm
Installation	On-wall mounting and in-wall mounting


## JSL-I11 Functional Capabilities

Call	One-key call to the smart terminal and APP
Surveillance	Supports surveillance of the doorbell by the smart terminal and APP.
Access Control	Unlock by swiping IC cards/NFC cards. Unlock via the smart terminal or mobile APP.
Fill Light	Adaptive infrared fill light.
Motion Detection	Supported.
Capture Pictures	Supports capturing pictures and saving them to the mobile APP.
Record Videos	Supports manually recording videos and saving them to the mobile APP.
TF Card	Supported (TF card is not included by default).

### JSL-05W Specifications

<b>Screen</b>	7" TFT LCD
<b>System</b>	Linux
<b>Body</b>	ABS + Tempered Glass
<b>Resolution</b>	1024*600
<b>Input</b>	Capacity Touch
<b>Alarm Input</b>	4-way Input Detection
<b>Video Coding</b>	H.264 / H.265
<b>Audio</b>	G.711
<b>Power Supply</b>	DC12V / 1A or POE power supply
<b>Power Output</b>	1-way 12V/200mA
<b>RS485</b>	Optional
<b>Working Current</b>	< 500mA
<b>Working Temperature</b>	-10°C ~ +45°C
<b>Storage Temperature</b>	-10°C ~ +45°C
<b>Working Humidity</b>	10%~90%
<b>Size (LWH)</b>	255x170x15.5mm
<b>Installation</b>	wall mounting

### JSL-I11 Dimension

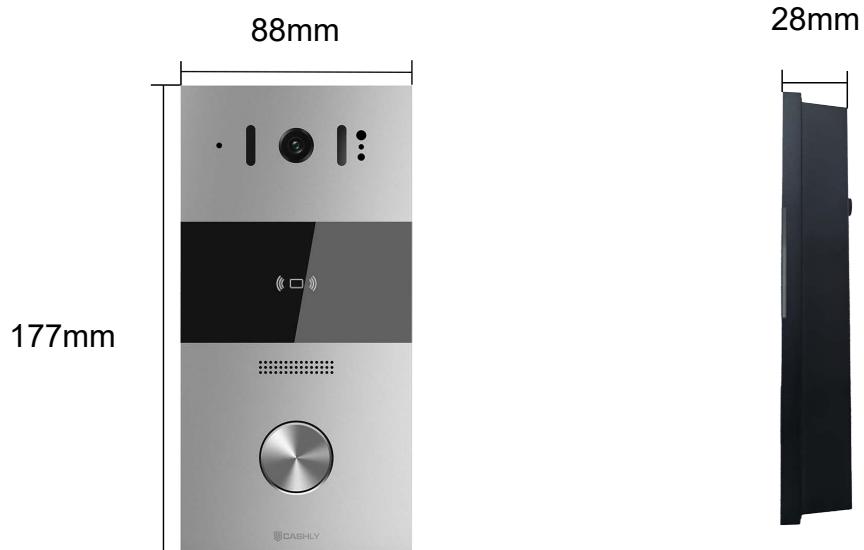

### JSL-05W Dimension

