

Description

The JSL-I2 is a compact, non-visual IP indoor intercom station designed for reliable and convenient audio communication in smart intercom systems. Featuring a sleek white ABS panel, mechanical button operation, and PoE power supply, it supports handset audio intercom, unlocking, privacy mode, emergency help, and security alarms. Ideal for residential, office, and multi-apartment installations, it ensures stable performance even in challenging environments.

Main Features


- Handset Audio Intercom – Clear and stable two-way communication.
- Privacy Mode – Disable inter-apartment calling if desired.
- Digital Intercom Support – Internal calls between apartments.
- Unlock Function – Unlock doors directly during an incoming call.
- Security & Emergency Functions – Security alarm, anti-dismantle alarm, and emergency help support.
- Call Center Access – Direct connection to building reception or security desk.
- Don't Disturb Mode – Avoid unwanted calls during specific hours.
- Secondary Doorbell Support – Allows connection to an extra doorbell.
- Alarm Integration – Device emits an alarm tone when detectors are triggered, with quick dismissal options.
- PoE Powered – Simplifies installation by integrating power and data over one cable.



Specification

Panel	Plastic (White ABS)
Operation	Mechanical Button
Speaker	8Ω, 1.5W
Microphone	-56dB
Power Supply	DC 24~48V ±10% (PoE)
Working Temperature	-25°C ~ 40°C
Storage Temperature	-40°C ~ 60°C
Working Humidity	10% ~ 90% RH
IP Level	IP30
Interface	Power In Port; RJ45 Port; Alarm In Port
Installation	86 Box Installation / Screw Fixed
Dimension (mm)	188 × 83 × 42

Appearance and Interfaces

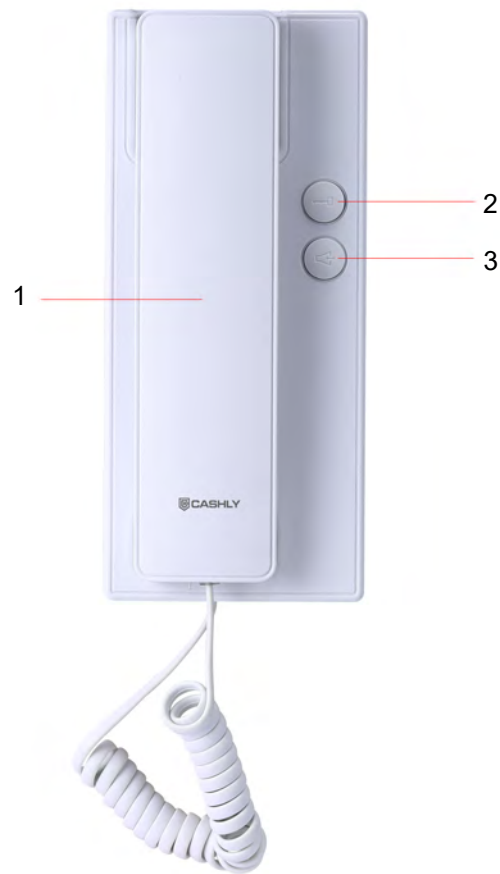

NO.	Description
1	Handset
2	Unlock Button
3	Call Button

Dimension

